



Helmer Scientific, Noblesville, Indiana  
www.helmerinc.com


Technical Data Sheet  
High-Performance, Medical-Grade Refrigerator  
Model: HLR118-GXC, Horizon Series™ Laboratory / Upright

Application, Rating, & Electrical Data	
Application	High-performance storage of medical and scientific products
Storage Volume	18.4 cu ft   521 L
Temperature Range	+2°C to +10°C
Set Point	+4°C
Electrical Power	115V 60Hz   208-240V 50/60Hz
Maximum Current	3.0A   2.0A
Facility Supply Rating	Branch circuit with earth ground, meeting plug/cord ratings as well as local electrical safety codes and requirements 110-120V AC: 15 A (minimum) 208-240V AC: 10 A (minimum)
Power Plug/Power Cord Length	NEMA 5-15 hospital-grade   115V 60Hz, 10 ft (3.0m) Inquire about additional plug/cord options
Certification/Agency Listing	QPS (Certified to UL and CSA Standards) IEC/UL61010-2-011:2016   IEC 61010-1:2010, AMD1:2016
Energy Star	Yes, ENERGY STAR® Certified High Performance Refrigerator
Indoor/Outdoor Use	Indoor use only, non-residential
Application Environment	Non-corrosive, non-flammable, non-explosive
Ambient Operating Temperature	+15°C to +32°C   +59°F to +90°F
Refrigeration	
Refrigeration System	VCC compressor-based, forced-air hydrocarbon
Compressor	Hermetic, variable speed (VCC). Rated speed range: 1300-4000 rpm
Condenser Type	Air-cooled fin and tube, sealed
Expansion Device	Cap tube
Evaporator Type	Direct expansion with forced-air fin and tube
Defrost Method	Automatic
Refrigerant	R600a, Isobutane, EPA SNAP compliant
Controller / Configuration Settings	
User Interface	LED digital display, °C or °F
Power Switch	On/Off
Controller Type	Microprocessor with button input and LED display
Security	Lockable door
Control Sensor	NTC, sealed
Communication Port	Remote alarm contacts
Power Failure Alarm	Yes
High/Low Alarms	Yes, fully adjustable
Door Ajar Alarm	Yes
Min/Max Temperature	Yes, display and reset
Temperature Monitoring Ballast	Yes, 4 oz bottle with screw cap, solid ballast optional
Battery Back-up	Yes, 9 hr monitoring system   Rechargeable 12V, lead acid


Performance Characteristics	
Energy Consumption   kWh/day	2.81
Noise emission   dB	49
Heat Rejection / Emission   BTU/hr	879

All performance data from 18 cu ft refrigerator, 24.8°C ambient, 4.0°C


Dimensions and Construction	
Interior (w x h x d)	22.5 x 58.1 x 24.0 in   571 x 1476 x 609 mm
Exterior (w x h x d)	26.8 x 79.0 x 28.1 in   680 x 2006 x 714 mm
Overall Exterior (w x h x d)	26.8 x 79.0 x 32.5 in   680 x 2006 x 824 mm
Insulation	Sustainable, US EPA and SNAP approved foam
Exterior/Interior Finish	Bacteria-resistant powder-coating
Door	1, dual-pane glass, right-hinge
Access Port	Top Access Port - for external monitoring probe(s) (0.75 in   19 mm diameter) Left Sidewall Port - with interior and exterior plugs (1.75 in   45 mm diameter)
Interior Storage (w x d)	3 ventilated, powder coated shelves, adjustable 20.2 x 22.0 in   515 x 558 mm, 100 lb   46 kg max capacity/shelf
Casters	Yes, swivel-locking
Net Weight	335 lb   152 kg
Shipping Weight	384 lb   174 kg
Clearance Requirements	Minimum of 8 in (203 mm) above and 3 in (76 mm) behind unit for proper ventilation, clearance, and feature access
Options   Accessories	Temperature chart recorder (stand-alone), Chart paper, Leveling feet, Solid ballast, Remote alarms, Floor and Wall bracket kit, Seismic anchoring kit, Storage trays, Left-hinge door, Solid door, Extended warranty
Warranty	Rel.i™ Warranty- 5 years compressor, 2 years parts, 1 year labor Outside US and Canada- Contact your distributor for warranty information

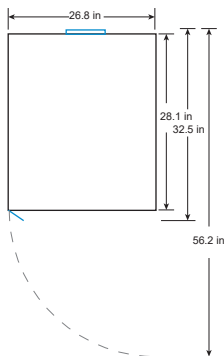


TOP VIEW

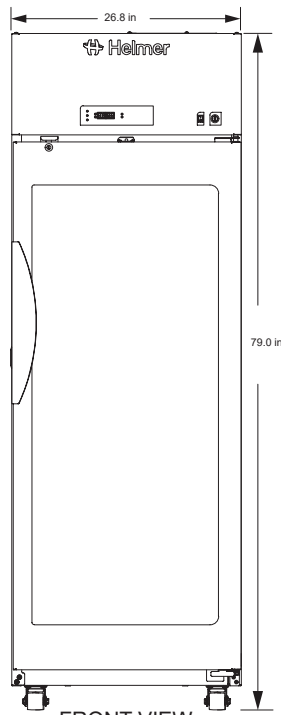

FRONT VIEW

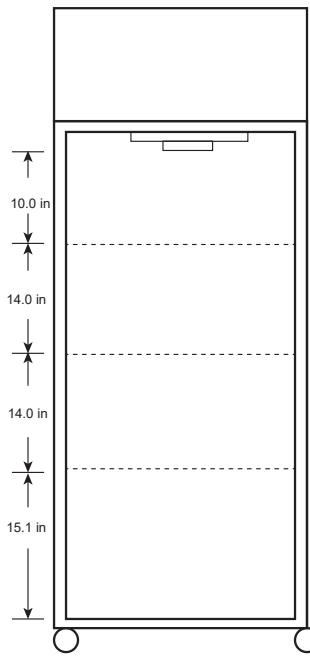

INTERIOR VERTICAL SPACING

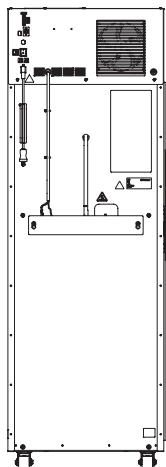

BACK VIEW