
- Supports loads up to 500 lbs, (277 kg) making it easy to transport and position heavy materials wherever the job demands
- Adjusts from 14.5” to 43.5” (368 mm to 1105 mm), bringing materials to the ideal working height and reducing strain across a wide range of tasks
- Lifts at a consistent 0.4”/sec (11 mm/sec), giving operators precise control when positioning sensitive or heavy materials
- 316L stainless steel construction withstands harsh chemicals, moisture, and rigorous cleaning protocols without compromising integrity
- Engineered to meet the strict requirements of food processing, pharmaceutical, cleanroom, and chemical handling facilities








Features

- High quality 304L and 316L stainless steel
- Foot pump and powered lift available
- Delrin rollers and bushings
- Battery powered, air powered and A/C powered
- Platform sizes to 48” x 72” (1,200mm x 1,600 mm)
- Lift heights to 78” high
- Nickel plated and stainless and washdown pumps

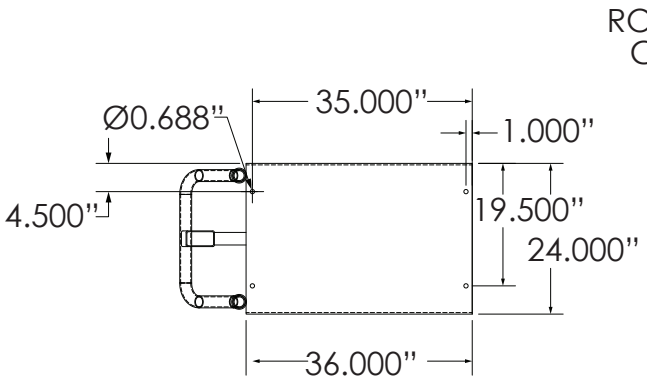

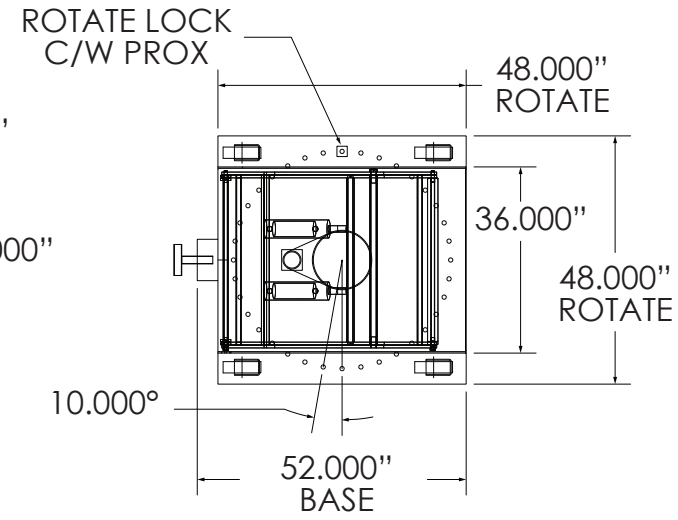

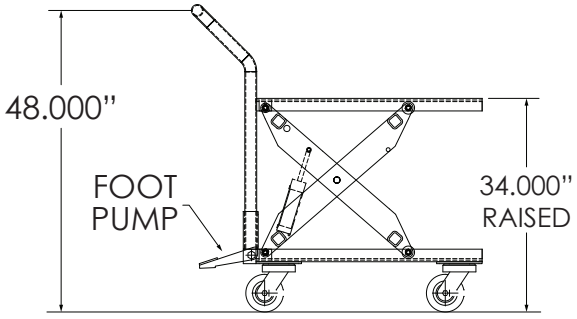

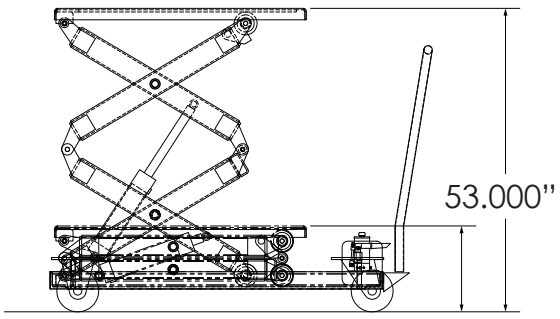

Terra Universal, Inc. • TerraUniversal.com • 800 S. Raymond Ave. Fullerton, CA 92831 USA • TEL: +1-714-578-6000 FAX: +1-714-578-6020

Model	Capacity (lbs)	Lowered lift	Raised Height	Platform Size	Alternate plaform size
Foot Pump Models					
SL SS34-05	500	16”	34”	24” x 36”	36” x 48”
SL SS34-10	1,000	16”	34”	24” x 36”	36” x 48”
Double Foot Pump Models					
SL SSD54-05	500	18”	72”	24” x 36”	36” x 48”
SL SSD54-10	1,000	18”	72”	24” x 36”	36” x 48”
Powered Models					
SL SSP34-05	500	16”	34”	24” x 36”	48” x 60”
SL SSP34-10	1,000	16”	34”	24” x 36”	48” x 60”
SL SSP34-15	1,500	16”	34”	24” x 36”	48” x 60”
SL SSP34-20	2,000	16”	34”	24” x 36”	48” x 60”
Double Powered Models					
SL SS960-05	500	18”	78”	36” x 48”	60” x 72”
SL SS960-10	1,000	18”	78”	36” x 48”	60” x 72”
SL SS960-15	1,500	18”	78”	36” x 48”	60” x 72”
SL SS960-20	2,000	18”	78”	36” x 48”	60” x 72”
SL SS960-30	3,000	18”	78”	36” x 48”	60” x 72”
SL SS960-40	4,000	18”	78”	36” x 48”	60” x 72”

Terra Universal, Inc. • TerraUniversal.com • 800 S. Raymond Ave. Fullerton, CA 92831 USA • TEL: +1-714-578-6000 FAX: +1-714-578-6020